



Magna-Tite® The Fastener for Thin or Compressible Materials

Broad Blind Side Bulb
Fast Installation
Ideal for Repair Applications

3/16", 1/4"





Huck Magna-Tite®

All-Aluminum Fastener Ideal for Thin or Low-Strength Materials

The Huck Magna-Tite® is a specialized aluminum structural rivet fastener well-suited for use within oversized holes and repair applications.

During installation, Magna-Tite clamps the joint with a broad blind-side bulb, making it ideal for installation in thin materials such as aluminum, fiberglass and plastic. Unlike other bulbing blind fasteners, the Magna-Tite has a unique embedded sealant applied between the pin and the sleeve. This sealant oozes into the joint during installation, completely filling any gap, and ensuring water resistance.

Secure, Fast Installation



Large blind-side footprint for installation in thin or compressible materials where controlled strength is required.



Unique embedded sealant applied between the pin and sleeve

Advanced Huck® Tooling

Huck offers a choice of hydraulic installation tools designed for the the Magna-Tite. Supporting these tools is Huck's Powerig® 940, a portable hydraulic power source for moderate production and repair applications.




Installation Tools – Weight and Dimensions

DIAMETER	MODEL	NOSE ASSEMBLY	INSERT	TYPE	WEIGHT	LENGTH	HEIGHT	WIDTH
3/16"	BV4500-118	99-3487-6MT	126969-PROTRUDING, 126970-FLAT*	BATTERY	5 LBS	14.25"	10.63"	3.75"
	2022	99-3487-6MT		PNEUDRAULIC	5.4 LBS	8.6"	12.6"	4.4"
	2024	99-3487-6MT		PNEUDRAULIC	5.75 LBS	8.9"	12.6"	4.4"
	202	99-3487-6MT		PNEUDRAULIC	5.1 LBS	8.6"	12.5"	4.1"
	2480			HYDRAULIC	2.2 LBS	8.6"	6.5"	1.9"
1/4"	BV4500-118	99-3487-8MT	126971-PROTRUDING, 126972-FLAT*	BATTERY	5 LBS	14.25"	10.63"	3.75"
	2022	99-3487-8MT		PNEUDRAULIC	5.4 LBS	8.6"	12.6"	4.4"
	2024	99-3487-8MT		PNEUDRAULIC	5.75 LBS	8.9"	12.6"	4.4"
	202	99-3487-8MT		PNEUDRAULIC	5.1 LBS	8.6"	12.5"	4.1"
	2480			HYDRAULIC	2.2 LBS	8.6"	6.5"	1.9"

*Insert Included with nose assembly

Types

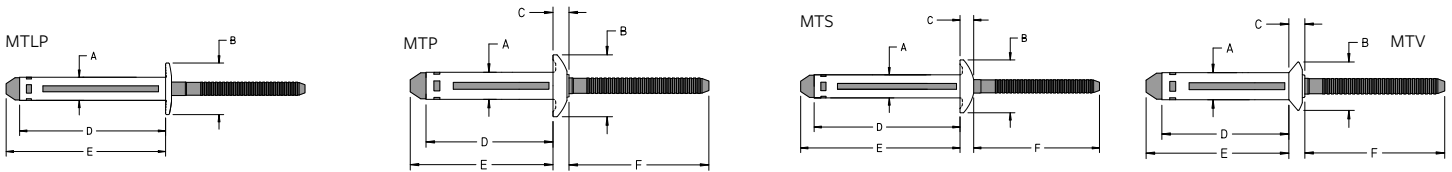

Data and Dimensions

DIAMETER (NO.)	PART NO.	GRIP RANGE	HOLE SIZE	A NOM	B NOM	C NOM	D MAX	E MAX	F MIN
PROTRUDING HEAD									
3/16" (6)	MTP-B6-5S	.050 - .312	.205 - .221	.199	.453	.113	.890	1.020	.940
	MTP-B6-6S	.100 - .375	.205 - .221	.199	.453	.113	.940	1.070	.940
	MTP-B6-8S	.250 - .500	.205 - .221	.199	.453	.113	1.090	1.220	.940
	MTP-B6-10S	.375 - .625	.205 - .221	.199	.453	.113	1.215	1.345	.940
	MTP-B6-12S	.500 - .750	.205 - .221	.199	.453	.113	1.340	1.470	.940
1/4" (8)	MTP-B8-4S	.040 - .250	.250 - .263	.239	.530	.120	.825	.990	.950
	MTP-B8-6S	.125 - .375	.250 - .263	.239	.530	.120	.955	1.120	.950
	MTP-B8-7S	.160 - .410	.250 - .263	.239	.530	.120	.985	1.150	.950
	MTP-B8-8S	.250 - .500	.250 - .263	.239	.530	.120	1.075	1.240	.950
	MTP-B8-10S	.375 - .625	.250 - .263	.239	.530	.120	1.200	1.365	.950
MTP-B8-12S	.500 - .750	.250 - .263	.239	.530	.120	1.325	1.490	.950	
SHAVED HEAD									
3/16" (6)	MTS-B6-8S	.050 - .500	.205 - .221	.199	.453	.113	1.010	1.140	.940
	MTS-B6-12S	.050 - .750	.205 - .222	.199	.453	.113	1.260	1.390	.940
LOW PROFILE (NON-STRUCTURAL)									
3/16" (6)	MTLP-B6-4	.050 - .250	.205 - .221	.199	.442	.052	.840	.970	.940
	MTLP-B6-8	.187 - .500	.205 - .221	.199	.442	.052	1.090	1.220	.940
	MTLP-B6-12	.375 - .750	.205 - .221	.199	.442	.052	1.260	1.390	.940
	MTLP-B6-12X	.050 - .750	.205 - .221	.199	.442	.052	1.260	1.390	.940
100° COUNTERSUNK OVAL HEAD									
3/16" (6)	MTV-B6-5S	.070 - .312	.205 - .221	.199	.355	.113	.910	1.040	.940
	MTV-B6-7S	.160 - .410	.205 - .221	.199	.355	.113	1.010	1.140	.940
	MTV-B6-8S	.250 - .500	.205 - .221	.199	.355	.113	1.090	1.220	.940
	MTV-B6-10S	.375 - .625	.205 - .221	.199	.355	.113	1.215	1.345	.940
	MTV-B6-12S	.500 - .750	.205 - .221	.199	.355	.113	1.340	1.470	.940

Installed Values in Nominal Grip (lbs.)

DIAMETER		HEAD STYLES							
		PROTRUDING		SHAVEABLE		LOW PROFILE		OVAL	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
3/16"	SHEAR	550	630	550	630	300*	350	550	630
	TENSILE	390	450	390	450	390	450	390	450
	PIN RETENTION	70	100	70	100	70	100	70	100
1/4"	SHEAR	950	1100						
	TENSILE	575	650						
	PIN RETENTION	70	100						

*550 lbs. minimum in minimum grip only



**HOWMET
AEROSPACE**

Howmet Fastening Systems

Industrial Division Brands



Huck, Marson, Recoil, Keysert, Camloc, Simmonds and Snep are trademarks of Howmet Aerospace Inc. and/or its subsidiaries.

North America

Waco Operations

PO Box 8117
8001 Imperial Drive
Waco, TX 76714-8117
Tel: +1 800-388-4825
Fax: +1 800-798-4825
hfs.sales.waco@howmet.com

Kingston Operations

1 Corporate Drive
Kingston, NY 12401
Tel: +1 800-278-4825
Fax: +1 845-334-7333
hfs.sales.kingston@howmet.com

Tracy Operations

1925 North MacArthur Drive
Tracy, CA 95376
Tel: +1 800-826-2884
Fax: +1 800-573-2645
hfs.sales.idg@howmet.com

Global

Telford Operations

Unit C, Stafford Park 7
Telford, Shropshire
England TF3 3BQ
Tel: +44 (0) 1952-290011
Fax: +44 (0) 1952-290459
thisales@howmet.com

Suzhou Operations

58 Yinsheng Road,
SIP Suzhou, Jiangsu
215126 China
Tel: +86-512-62863800-8888

Melbourne Operations

1508 Centre Road
Clayton, Victoria
Australia 3168
Tel: +613-8545-3333
Fax: +613-8545-3390
hfs.sales@howmet.com

Tokyo Operations (Japan & Korea)

1013 Hibiya U-1 Bldg.
Uchisaiwai-cho 1-1-7
Chiyoda-ku, Tokyo
100-0011 Japan
Tel: +81-3-3539-6594
Fax: +81-3-3539-6585

hfsindustrial.com

[YouTube.com/HFSIndustrial](https://www.youtube.com/HFSIndustrial)

The information contained in this publication is only for general guidance, and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only in Howmet Fastening Systems' written quotations, acknowledgments, and/or purchase orders. It is recommended that the user secure specific, up-to-date data and information regarding each application and/or use of such products.